


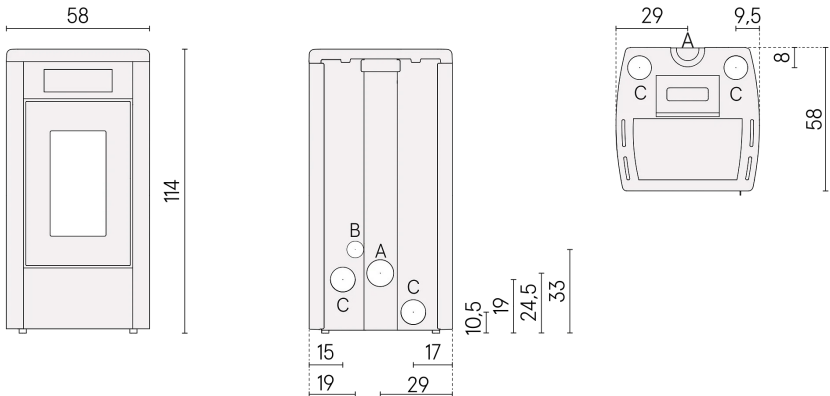

Pellet Air Plus

TECHNICAL DATA

Thermic Power (at min-at max)	kW	3,7 - 12,0
Introduced thermal power (at max)	kW	13,5
Water useful power (at min-at max)	kW	- - -
Seasonal energy efficiency	ηs [%]	84
Useful efficiency (at min-at max)	%	90 - 89
Heatable volume (at min-at max)	m³	105 - 342
CO ₂ (min-max)	%	5,0- 11,9
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	140 - 125
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	10- 2
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	120 - 99
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	17 - 15
Fuel Pellet	mm	Ø6 L=3÷40
Hopper capacity	kg	23
Hourly consumption (at min-at max)	kg/h	0,9 - 2,8
Autonomy (at min-at max)	h	26 - 8
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	360
Operating electrical absorption (at max)	W	153
Chimney flue depression (at min-at max)	Pa	11 - 12
Mass of smoke (at min-at max)	g/sec	5,7 - 8,8
Exhaust fumes temperature (at min-at max)	°C	107 - 200
Distance from material comb. (back/side/under)	mm	200 / 300 / 0
Distance to material comb. (front/top)	mm	1000 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	80
Ductable up to	m	8

PLUS

5 stars D.M. 186	Flexibility of installation	Back exhaust
Upper exhaust (optional)	Concentric flue kit (optional)	Cast iron door
Top and rear ducting	Sealed Chamber	Cast iron burning pot

AVAILABLE FINISHES

7023110		Majolica White	EAN 8053859019824
7023111		Majolica Ivory	EAN 8053859019831
7023112		Majolica Red Bordeaux	EAN 8053859019848
7023113		Steel White	EAN 8053859019855
7023115		Steel Titanium	EAN 8053859019879
7023116		Steel Red Bordeaux	EAN 8053859019886
7023117		Steel Anthracite	EAN 8053859019893

OPTIONAL

5020003	Upper ducting kit	EAN 8053859012573
5020004	Upper concentric kit	EAN 8053859012580

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 16510-1:2022/
EN 16510-2-6:2022

CE

A+

STOVE PACKAGE

L (cm)	H (cm)	P (cm)
80	130	68
Volume (m³)	0,71	
Gross weight (kg)	163	
Net weight (kg)	152	

STORAGE

N° (max)
1

TRANSPORT

60 pz