


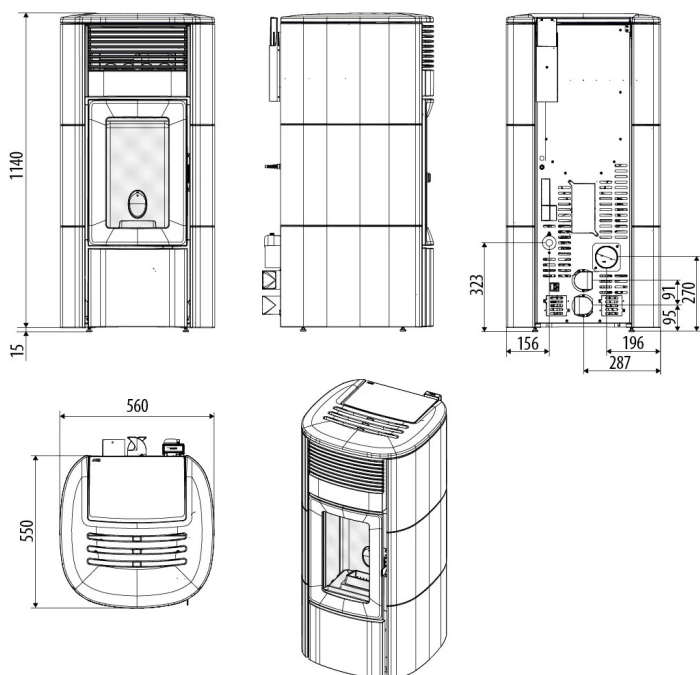

EN 16510

BlmSchV Stufe 2

Regensburger BStV / Aachener BStV / Munchener BStV

ART.15a B-VG / Klimafonds / LRV

4 stelle DM.186 / Conto Termico 2.0



(Max) nominal heat output	11.9 kW
Minimum heat output	3.9 kW
Efficiency at Max	90.8 %
Efficiency at Min	93.5 %
Energy Efficiency Class (A++ / G scale)	A+
Energy Efficiency Index (EEI)	128 %
Seasonal space heating energy efficiency (ηs)	87 %
Temperature of exhaust smoke at Max	232 °C ***
Temperature of exhaust smoke at Min	103 °C ***
PM / OGC / NOx at Max (13% O ₂)	14 / 1 / 148 mg/Nm ³
PM / OGC / NOx at Min (13% O ₂)	14 / 1 / 98 mg/Nm ³
CO at 13% O ₂ at Min and at Max	0.014 / 0.008 %
CO ₂ at Min and at Max	7 / 13.5 %
Recommended draught at Max power	10 Pa ****
Minimum draught allowed for minimum power	5 Pa ****
Mass of smoke at Min and at Max	4.2 / 6.4 g/sec
Hopper capacity	46 l / 30 kg *
Fuel dimensions	Ø6mm L3÷40mm
Hourly consumption at Min and at Max	0.9 / 2.7 kg/h *
Autonomy at Min and at Max	33 / 11 h *
Heatable volume m3	216 / 340 / 595 **
Combustion air inlet	Ø 50 mm
Air inlet	80 cm2
Smoke outlet	Ø 80 mm
Nominal electrical power (EN 60335-1).	129 W (max 340 W)
Supply voltage and frequency	230 Volt / 50 Hz
Net weight	180 kg
Distance from combustible material (back/side/under)	120 / 250 / 0 mm
Distance from combustible material (front/ceiling)	800 / 1000 mm

* Data that may vary depending on the type of pellets used.

**Heatable volume based on the requested power per m3 (respectively 55-35-20 W/m3)

*** Flue gas temperature at the appliance outlet, to be used in the chimney sizing calculation (according to EN 13384-1)

**** Consider a minimum draught of 2 Pa in the EN 13384-1 chimney dimensioning calculations