


EN 16510
BlmSchV Stufe 2
Regensburger BStV / Aachener BStV / Munchener BStV
ART.15a B-VG / Klimafonds / LRV
4 stelle DM.186 / Conto Termico 2.0

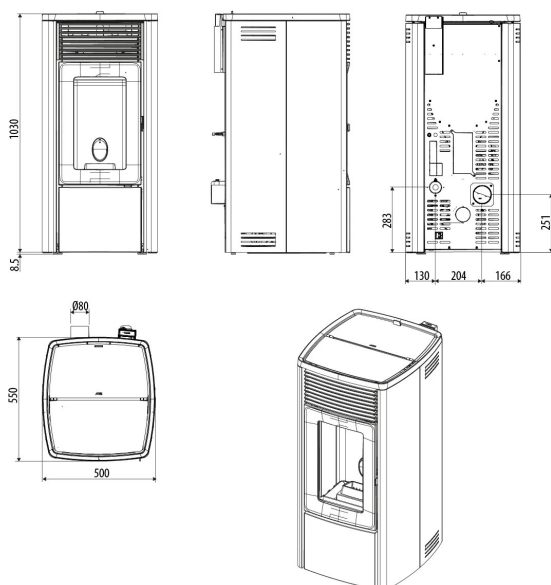

(Max) nominal heat output	8.1 kW
Minimum heat output	3.5 kW
Efficiency at Max	90.9 %
Efficiency at Min	91.5 %
Energy Efficiency Class (A++ / G scale)	A+
Energy Efficiency Index (EEI)	129 %
Seasonal space heating energy efficiency (ηs)	88 %
Temperature of exhaust smoke at Max	226 °C ***
Temperature of exhaust smoke at Min	130 °C ***
PM / OGC / NOx at Max (13% O ₂)	17 / 1 / 142 mg/Nm ³
PM / OGC / NOx at Min (13% O ₂)	14 / 1 / 100 mg/Nm ³
CO at 13% O ₂ at Min and at Max	0.014 / 0.008 %
CO ₂ at Min and at Max	7.2 / 14 %
Recommended draught at Max power	10 Pa ****
Minimum draught allowed for minimum power	5 Pa ****
Mass of smoke at Min and at Max	3.7 / 4.3 g/sec
Hopper capacity	39 l / 25 kg *
Fuel dimensions	Ø6mm L3÷40mm
Hourly consumption at Min and at Max	0.8 / 1.8 kg/h *
Autonomy at Min and at Max	31 / 14 h *
Heatable volume m ³	147 / 231 / 405 **
Combustion air inlet	Ø 50 mm
Air inlet	80 cm ²
Smoke outlet	Ø 80 mm
Nominal electrical power (EN 60335-1).	56 W (max 340 W)
Supply voltage and frequency	230 Volt / 50 Hz
Net weight	127 kg
Distance from combustible material (back/side/under)	40 / 100 / 0 mm
Distance from combustible material (front/ceiling)	800 / 1000 mm

* Data that may vary depending on the type of pellets used.

**Heatable volume based on the requested power per m³ (respectively 55-35-20 W/m³)

*** Flue gas temperature at the appliance outlet, to be used in the chimney sizing calculation (according to EN 13384-1)

**** Consider a minimum draught of 2 Pa in the EN 13384-1 chimney dimensioning calculations