

ICON PLUS 9


PELLET AIR PLUS - Pellet stoves



Certificate model name : ICON PLUS 9 T1



Nominal power	kW	8,5
Reduced power	kW	2,5
Introduced thermal power (max)	kW	9,7
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Seasonal energy efficiency	ηs [%]	83
Nominal efficiency	%	87
Reduced efficiency	%	90
Heating volume (min-max)	m³	70 - 238
Nominal CO at 13% O ₂	%	0,013
Reduced CO at 13% O ₂	%	0,024
Emissions CO (13% O ₂) (min-max)	mg/Nm³	297 - 160
Emissions OGC (13% O ₂) (min-max)	mg/Nm³	5 - 3
Emissions NOX (13% O ₂) (min-max)	mg/Nm³	120 - 140
Dust content at 13% O ₂ (min-max)	mg/Nm³	20 - 15
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	17
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,6 - 2,1
Autonomy (min-max)	h	8 - 28
Ignition electrical absorption (max)	W	340
Operating electrical absorption (max)	W	106
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	10
Mass of smoke (min-max)	g/sec	3,1 - 6,0
Exhaust fumes temperature (max)	°C	211
Net weight	kg	87
Gross weight	kg	97
Exhaust fumes (A)	Ø mm	80
Hole combustion air inlet (B)	Ø mm	50
Ducting outlet (C)	Ø mm	80
Ducting capability up to	m	6

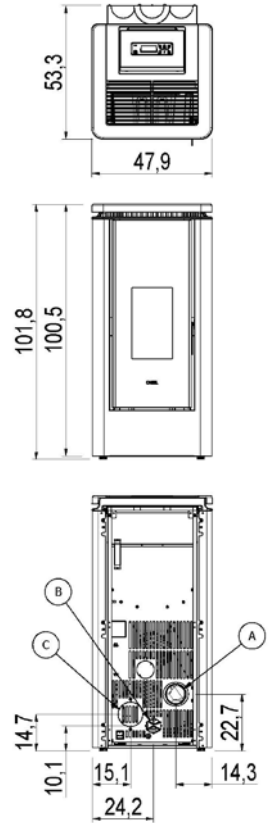

MATCH

7022090	White steel	EAN 8053859015802
7022091	Red steel	EAN 8053859015819
7022092	Anthracite steel	EAN 8053859015826
7022093	Steel light bronze	EAN 8053859015833
7022094	Steel titanium	EAN 8053859015840


OPTIONAL :

5022001	Upper exhaust kit	EAN 8053859015536
5022003	Upper + concentric exhaust kit	EAN 8053859015550
5020003	Upper ducting kit	EAN 8053859012573

PLUS

	Cast iron burning pot		Sealed chamber		Ducting with 1 independent motor
	Integrated Wi - Fi		Connection to the room thermostat		Comfort mode
	Back exhaust		Bluetooth		Concentric flue kit (optional)
	Daily weekly programming		Upper exhaust (optional)		Flexibility of installation


STOVE PACKING



L (cm)	H (cm)	P (cm)
79	117.7	60


VOLUME (m³)
0.56

LINING PACKING



L (cm)	H (cm)	P (cm)

STOCKING



TRANSPORT

